

Holloway Green Street Annual Monitoring Report 2018-2019

Project Overview

The San Francisco Public Utilities Commission (SFPUC) is currently implementing the first phase of the 20-year \$6.9 billion citywide Sewer System Improvement Program (SSIP). As part of the first phase of the SSIP, the SFPUC is constructing eight green infrastructure (GI) Early Implementation Projects (EIPs), one in each of San Francisco's urban watersheds. The Holloway Green Street project is the EIP in the Lake Merced watershed.

The Holloway Green Street project implements two types of green infrastructure, bioretention planters and permeable pavement, along eight blocks of Holloway Avenue starting at Ashton Avenue and extending east to Lee Avenue in the Ingleside neighborhood. Holloway Avenue is a typical 60-foot-wide neighborhood residential street with two lanes of traffic and parallel parking along both sides. The street blocks are short, approximately 225 linear feet. Sidewalks along Holloway and Harold are typically 12 feet wide and contained minimal landscaping or street trees prior to project construction.

Bioretention takes two forms. Corner bulbouts containing either flow-through planters or rain gardens are on the western end of six blocks. One block between Jules Ave and Faxon Ave has a series of mid-block infiltrative bioretention planters within the sidewalk in lieu of corner bulbouts, which were infeasible due to driveway conflicts. The final block between Faxon Ave and Capitol Ave has no bioretention, only permeable pavement. The bioretention planters are sized to manage stormwater runoff from the sidewalk, as well as a small portion of the roadway that drains directly to the planters.

Pervious concrete was installed within the 7-foot-wide parking lanes on both sides of Holloway Ave on all eight blocks in the project area. The pervious concrete removes additional stormwater from the combined sewer system by capturing the majority of the roadway runoff, storing it in a subsurface gravel reservoir layer, and infiltrating it into the underlying native soil as feasible.

The Holloway Green Street green infrastructure facilities are sized to manage stormwater from the street and sidewalks as well as the facilities themselves, collectively referred to as the drainage management area (DMA). The blocks have varying configurations and combinations of bioretention corner bulbouts, mid-block bioretention planters, and permeable pavement. One block has underdrained bioretention while the rest are infiltrative. All bioretention planters were initially sized by designers in accordance with the EIP Minimum Performance Metric, which calls for an aggregate 0.75 inches of unit storage¹. For typical rain gardens, this translates into a sizing ratio² of around 5%. The equivalent sizing ratio for the permeable pavement is 25%. Facility sizing was refined during design development based on physical constraints and a site-specific hydrologic model³ to more accurately reflect site conditions. Geotechnical exploration found a mixture of soil types⁴. Final design resulted in a bioretention sizing ratios ranging from 3.4% to 6.5% and permeable pavement sizing ratios ranging from 25% to 31%. Sizing ratios at the monitored blocks ranged from 4.0% to 4.7% for bioretention and 25% to 27% for pervious concrete.

¹ Unit Storage Depth is a measure of the storage capacity provided by GI relative to its DMA. It is equal to the depth of water that, if multiplied by the DMA, is equal to the storage provided by the GI facilities.

² Sizing Ratio is a measure of GI facility footprint relative to its DMA. It is equal to the facility size divided by the DMA.

³ EPA Stormwater Management Model (SWMM), Version 5.1.

⁴ Double-Ring Infiltrometer tests performed on five blocks indicated infiltration rates ranging from 0.30 in/hr to 3.67 in/hr. Per SFPUC guidance, a correction factor of 0.33 was applied to yield design infiltration rates ranging from 0.10 in/hr to 1.22 in/hr



Figure 1a, 1b and 1c: A mid-block sidewalk planter, end-of-block bulbout planter, and pervious concrete.

Four blocks, all with varying GI technologies and underlying soil infiltration rates, were monitored for two water years, 2017-2018 and 2018-2019. This report focuses on the 2018-2019 water year, and a summary comparison between the two monitored water years is presented in the Performance Analysis Results section. Performance was evaluated through post-construction flow monitoring in catch basins at the end of each block. Baseline flows (i.e., stormwater runoff under pre-construction conditions) were established by monitoring an unimproved block adjacent to Holloway Avenue. The end-of-block flows were compared against baseline flows, and the difference was credited to facility performance. No monitoring was conducted prior to construction. The five monitoring locations including the baseline block and four GI locations (Figure 2) are located at:

- Capitol @ DeMontfort (baseline block)
- Holloway @ Jules (Mid block planters & pervious concrete)
- Holloway @ Faxon (Only pervious concrete)
- Holloway @ Capitol (End of block planters & pervious concrete)
- Holloway @ Plymouth (Underdrained end of block planters & underdrained pervious concrete)

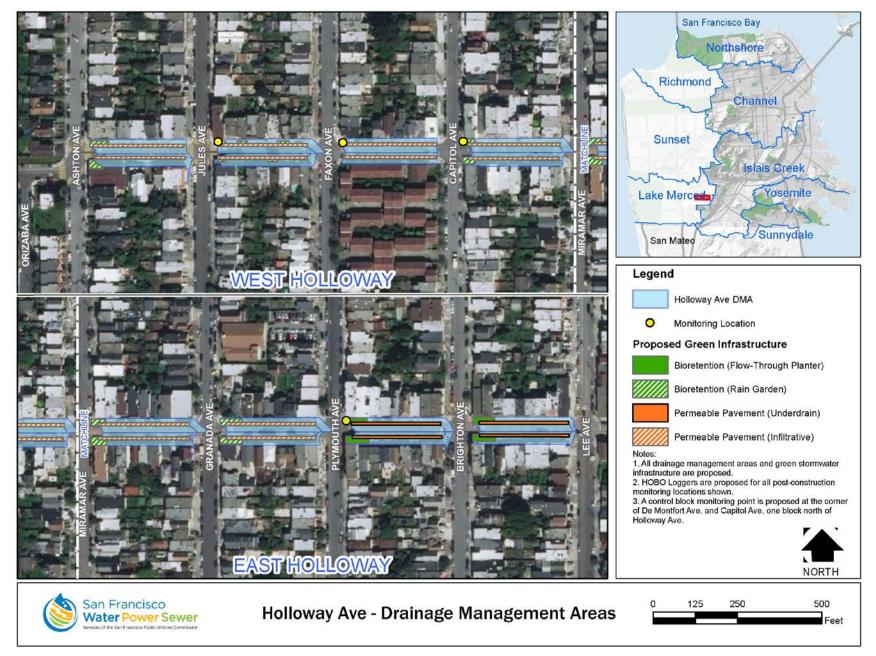


Figure 2: Project overview map

Figure 3 shows the spatial relationship between the baseline block and the project area.



Figure 3: Location of the baseline block relative to the project area

Table 1 provides the DMAs for both the baseline block and the monitored blocks, as well as the sizing ratio for the GI technologies. The baseline block DMA is larger than the project block DMAs because it is located on a corner where the two intersecting streets both drain to the catch basin. The DMAs were delineated using the subcatchment layer from the City and County of San Francisco (CCSF) Hydrologic and Hydraulic model and were then adjusted according to field observations of drainage patterns during wet conditions.

Μ	etric	Capitol x DeMontfort (Baseline block)	Holloway x Jules	Holloway x Faxon	Holloway x Capitol	Holloway x Plymouth
Total DMA (ft ²)		28,700	7,020	5,170	7,010	6,900
Design Infiltration Rate (in/hr)		N/A	0.71	1.22	0.86	0.14
	DMA (ft ²)	N/A	3,330	0	3,373	3,309
Bioretention	Area (ft ²)	N/A	139	0	158	134
	Sizing Ratio (%) ¹	N/A	4.2%	N/A	4.7%	4.0%
	DMA (ft2)	N/A	3,691	5,165	3,635	3,589
Pervious Concrete	Area (ft2)	N/A	977	1,293	938	940
	Sizing Ratio (%)	N/A	26.5%	25.0%	25.8%	26.2%

Table 1: Characteristics of the Holloway Green Street GI facilities and Drainage Management Areas (DMAs)

The Holloway Green Street project is estimated to have reduced the total volume of stormwater entering the sewer system from the project area by 78% (764,000 gallons) during the 2018-19 rainy season.

Learning Goal

The Holloway Green Street project installed different combinations of bioretention and pervious concrete across eight blocks that were virtually identical on the surface in terms of size, layout, and slope. This provides an excellent setting to compare the variation in performance that may result from different forms and combinations of GI on similar blocks, as well as variable soil conditions across the project area. For example, performance at the two blocks with underdrained permeable pavement and flow-through bioretention planters can be compared to a block with infiltrative permeable pavement and bioretention. The block with only permeable pavement can be compared against blocks with both permeable pavement and bioretention, and blocks with bulb-out planters at the intersections can be compared against mid-block planters.

Results of Monitoring Period 2018-2019

All the monitored blocks reduced the total volume and peak discharge rates to the CSS. The results of the monitoring data are discussed below in relation to these two primary performance metrics.

Was Flow Volume Reduced?

Overflow from the monitored blocks was significantly less than the baseline flow for all blocks. Measured across the whole rainy season, monitored volume reduction at the four blocks ranged from 56%-97% with an average 77%. Performance is strongly correlated to infiltration rate with the best performance at the western end of the project and generally decreasing to the east. The SWMM model was in general agreement with the monitoring results, estimating that GI reduced runoff volume by 83% across the four monitored blocks, and by 79% across the full project area. The SWMM model slightly oversimulated performance compared to the 2018-2019 monitoring results (83% modeled reduction versus 77% measured reduction for the four monitored blocks), while the 2017-2018 monitoring period slightly undersimulated performance (75% modeled reduction versus 78% measured). This may be a product of the porous media having slightly decreased infiltration capacity year over year due to deposition of fines in the pore space. According to both the monitoring results and the supporting modeling results, the overflow from the Model Block was significantly less than the baseline flow during the 2018-2019 monitoring period (Figure 8).

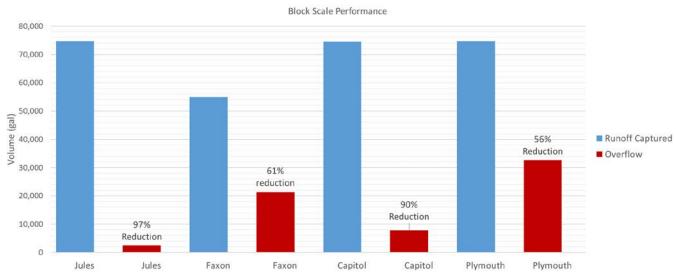


Figure 4: Monitored block performance for the 2018-2019 monitoring period.

Comparing modeled versus measured performance at the block scale (Table 3), three of the four monitored blocks are consistent with SWMM model predictions with volume reductions less than ten percentage points different. The exception is Holloway x Faxon, which saw a significantly smaller reduction than predicted (61% versus 100%).

The SFPUC decided to install pervious concrete all the way up to the curb on the Holloway x Faxon block, with the knowledge that fines might accumulate at the low-lying edge along the curb. The advantages of this configuration include less formwork during construction and, even though the concrete adjacent to the curb may become clogged and function as an informal gutter, heavier flows during intense rainfall spill farther out into the street where they can infiltrate through the cleaner concrete. Field reconnaissance in January 2019 confirmed that a thin swath of the permeable pavement had become clogged (Figure 9). As a result, the sidewalk portion of the DMA on this block is not fully managed because it mostly drains into the informal gutter and flows to the catch basin at the corner; there are no bioretention planters on this block to intercept gutter flow. This explains why monitored performance on this block was less than predicted by the model. Approximately 45% of the DMA on this block comes from the sidewalk. If the pervious concrete is assumed to manage 100% of the roadway runoff, as predicted by the model and supported by visual observation, then monitoring results for the 2018-2019 monitoring period indicate that effectively 20% of annual sidewalk runoff volume is managed by the pervious concrete while the other 80% flows directly to the catch basin. Results from the 2017-2018 monitoring period indicated that 25% of the sidewalk was effectively managed by the permeable pavement that year. The swath of clogged pavement abutting the curb may have widened slightly from one year to the next due to the deposition of additional fines and the vac trucks inability to clean that close to the curb.



Figure 5a and 9b: Fines clogging the pervious concrete, informal gutter formed at edge of curb.

The SWMM modeling results were used to extrapolate monitored project performance from four blocks to the entire project area. The ratio of monitored to modeled volume reduction at the four monitored blocks was applied to the modeled performance at the other four blocks to estimate their annual performance. Estimated performance for the blocks of Ashton, Miramar, and Granada were extrapolated from Jules and Capitol since those five blocks all have infiltrative bioretention and pervious concrete. Estimated performance at Brighton was extrapolated from Plymouth since both blocks have underdrained bioretention and permeable pavement.

Table 2: Modeled versus measured performance for the 2018-2019 rainy season

		DMA	Facility	BMP	Design Infiltration	Mode	eled Flow	Reductio	n		asured F eductio			oolated duction	
Block	Subcatchment	Size	Size	Sizing Ratio	Rate ¹	v	olume/		Peak Flow	Volun	ne	Peak Flow ²	Volun	ne	Peak Flow
		(sf)	(sf)	(%)	(in/hr) (gal) (%) (?		(%)	(gal)	(%)	(%)	(gal)	(%)			
	BR1-North	2,742	129	4.7%		16,662	56%	77%	700/						
Ashton	PP1-North	3,555	926	26.0%	0.20	33,307	94%	11%	79%				98,000	82%	77%
ASIIIOII	BR1-South	3,122	204	6.5%	0.20	23,529	70%	83%	85%				96,000	0270	///0
	PP1-South	3,555	926	26.0%		33,307	94%	0570	65%						
	BR2-North	3,330	139	4.2%		26,626	80%	0.00/	0.40/	72.200	070/	050/			
Jules	PP2-North	3,691	977	26.5%	0.71 ⁴	27,254	100%	90%	84%	72,200	97%	85%	122.300	97%	85%
Jules	BR2-South	2,955	101	3.4%	0.714	21,245	72%	87%	82%				122,300	97%	83%
	PP2-South	3,691	977	26.5%		27,254	100%	87%	82%						
Favan	PP3-North	5,165	1,293	25.0%	1.22	38,662	100%	100%	100%	33,600	61%	68%	61.200	61%	68%
Faxon	PP3-South	5,709	1,429	25.0%	1.22	42,679	100%	100%	100%				61,200	01%	08%
	BR4-North	3,373	158	4.7%		29,477	87%	0.20/	0.20/	CC 700	0.001	700/			
Capitol	PP4-North	3,635	938	25.8%	0.864	26,942	99%	93%	92%	66,700	90%	79%	110 000	90%	79%
	BR4-South	3,404	168	4.9%		30,388	88%	94%	4% 93%				116,600	90%	
	PP4-South	3,635	938	25.8%		26,942	99%	94%	5 55%						
	BR5-North	3,498	153	4.4%	0.49	26,330	75%	88%	83%						77%
	PP5-North	3,478	1,068	30.7%		34,799	100%	00%	83%				111,400	89%	
Miramar	BR5-South	3,120	123	3.9%	0.49	21,973	70%	86%	81%				111,400	69%	
	PP5-South	3,478	1,068	30.7%		34,799	100%	80%	81%						
	BR6-North	3,451	160	4.6%		23,742	67%	82%	83%						
Cranada	PP6-North	3,655	917	25.1%	0.324	35,537	97%	82%	83%				114,300	89%	77%
Granada	BR6-South	3,163	206	6.5%	0.32	26,468	81%	90%	91%				114,300	89%	1170
	PP6-South	3,655	917	25.1%		35,537	97%	90%	91/0						
	BR7-North	3,309	134	4.0%		6,656	18%	52%	35%	42.000	56%	56%			
Plymouth	PP7-North	3,589	940	26.2%	0.14	22,435	84%	52%	33%	42,000	50%	50%	70.600	56%	56%
Plymouth	BR7-South	3,172	165	5.2%	0.14	7,989	22%	55%	39%				70,600	50%	50%
	PP7-South	3,589	940	26.2%		22,435	84%	55%	59%						
	BR8-North	3,141	128	4.1%		5,344	17%	E 4 0/	210/						
Brighton	PP8-North	3,588	920	25.7%	0.104	29,086	81%	51%	31%				69,300	56%	56%
DIBUICON	BR8-South	3,095	180	5.8%	0.10-	7,284	23%	54%	33%				09,300	50%	50%
	PP8-South	3,588	920	25.7%		28,484	81%	54%	33%						
	TOTAL	106,132	18,244	16.3%	0.51	773,168	79	%	74%	212,400	76%	72%	763,700	78%	72%

1 Values reflect a correction factor of 0.33 consistent with SFPUC policy for double-ring infiltrometer testing.

2 Values are an average from storms with greater than 0.1 inches of rainfall.

3 Extrapolated reductions at non-monitored blocks were scaled up from model results based on the ratio of monitored to modeled reductions at monitored blocks with the same combination of GI facility types.

4 Value was interpolated from measured rates at two neighboring blocks.

Figure 10 through Figure 13 provide an overview for each monitored block showing the rainfall, inflow to the GI facilities, and overflow from the facilities to the sewer system during the full monitoring period from November through March. Rainfall is shown in green on the top axis with its values on the left axis. Inflow is shown in blue and outflow in red on the bottom axis with their values on right axis. Periods of intense rainfall exhausted facility storage and produced overlow to the sewer system, although significantly dampened from corresponding inflow to the facility. Low-intensity storms often produced little to no overflow from the green infrastructure, meaning that all runoff entering the GI facilities was fully infiltrated.

A 1.47-inch storm occurring over 14 hours on January 6th was the largest storm fully managed by any of the blocks (Holloway x Jules). This was the second largest storm that occurred during the monitoring period, and volume reduction for this storm on the other three blocks ranged from 28% at Plymouth to 84% at Capitol. The largest storm fully managed by Capitol was 1.04 inches on February 26^h, and the largest at Plymouth was 0.58 inches on February 3rd. Per the explanation above, Holloway x Faxon did not fully manage any storms larger than 0.1 inches. The largest storm to occur during the 2018-2019 monitoring period was 3.4 inches over 41 hours from February 12-14. Measured volume reduction ranged from 34% at Plymouth to 98% at Jules. Hydographs for this storm are presented later in this report for all four monitored blocks.

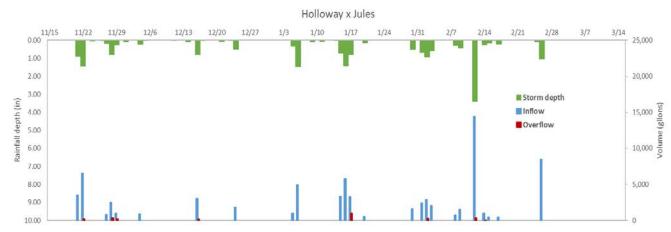


Figure 6: Hydrograph showing inflow and GI overflow of the 2018-2019 Monitoring Period at Holloway x Jules

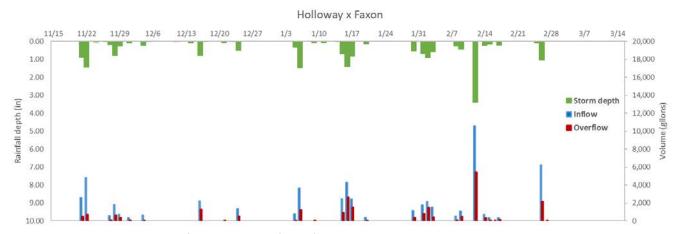


Figure 7: Hydrograph showing inflow and GI overflow of the 2018-2019 Monitoring Period at Holloway x Faxon

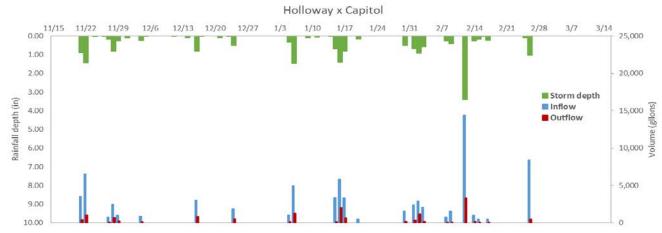


Figure 8: Hydrograph showing inflow and GI overflow of the 2018-2019 Monitoring Period at Holloway x Capitol

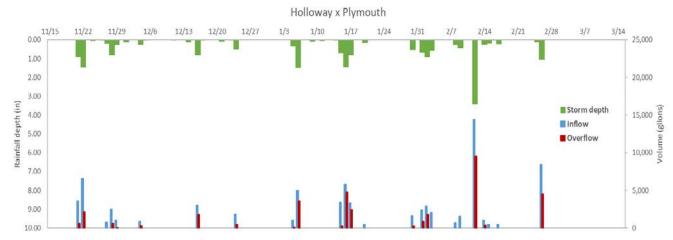


Figure 9: Hydrograph showing inflow and GI overflow of the 2018-2019 Monitoring Period at Holloway x Plymouth

How Did Volume Reduction Compare to the First Year of Monitoring?

The two rainy seasons, 2017-2018 (Year 1) and 2018-2019 (Year 2), were very similar in terms of total rainfall depth and number of overall storms. Year 1 saw rainfall of 18.3 inches distributed over 46 storms, 19 of which produced measurable runoff (>0.1 inch of precipitation). Year 2 was slightly wetter and saw 25 storms that produced measurable runoff totaling 19.3 inches. Year 2 had 32% more storms and only 5% more rainfall; therefore, the average storm was less intense during Year 2 as compared to Year 1. Performance at all four blocks varied to some degree from the reported performance for the previous 2017-18 rainy season. Overflow volumes from the four monitored blocks were reduced by an average of 78% during Year 1, and volumes were reduced by 77% during Year 2. Obstensibly, performance was very similar between the two years. However, the less intense rainfall in the second year caused the SWMM model to predict a volume reduction of 75% for Year 1 and a reduction of 83% for Year 2. Instead the performance relative to model predictions was down on all four blocks. This suggests that the deposition of fines in the porous media decreased infiltrative capacity somewhat and resulted in slightly lower performance relative to model predictions. Table 4 summarizes monitored performance at the four blocks.

		Year 1 (2017-1			Year 2 (2018-19)					
Site	Peak Flow Reduction, Storms with Overflow	Storms Fully Managed	Fully Block-Scale		Peak Flow Reduction, Storms with Overflow	Storms Fully Managed	Block-Scale Volume Reduction			
	(%)	(Out of 19)	(%)	(gal)	(%)	(Out of 25)	(%)	(gal)		
Holloway x Jules	94%	14	96%	57,500	75%	17	97%	72,200		
Holloway x Faxon	64%	0	67%	29,300	62%	0	61%	33,600		
Holloway x Capitol	89%	8	90%	53,500	68%	8	90%	66,700		
Holloway x Plymouth	38%	4	57%	33,100	45%	7	56%	42,000		
TOTAL			78%	173,400			77%	214,500		

Table 3: Comparison of estimated volume reductions during the 2017-2018 and 2018-19 rainy seasons

How Did GI Hold Up During Back-to-Back Storms?

Back-to-back storms are defined as successive storm events with the second storm starting within 6 to 24 hours of the end of the first. Of the 25 storms greater than 0.1 inch, there were 15 that qualify as back-to-back storms. The average volume reduction during the second of back-to-back storms was slightly lower than other individual storms (Table 5). Given that the average rainfall depths for individual storms and back-to-back storms are almost identical, it is generally expected that performance might decrease in the second of back-to-back storms as the soil becomes saturated. This is especially true in poorly draining soils. The Holloway Green Street project area has moderately draining soils, so the effect is in turn moderate. The two other EIP sites analyzed thus far (Phase I of the Permeable Wiggle and Sunset Green Boulevard) are both located in extremely well draining sand, and those projects found no discernible effects on performance for back-to-back storms.

	2 nd 0	f Back-to-Back Si	torms	All Other Individual Storms				
	Rainfall Depth	Volume Reduction	Storm Duration	Rainfall Depth	Volume Reduction	Storm Duration		
Site	(in)	(%)	(hh:mm)	(in)	(%)	(hh:mm)		
Holloway x Jules		98%	07.00	0.40	96%			
Holloway x Faxon	0.41	64%			58%	09:21		
Holloway x Capitol	0.41	90%	07:00	0.40	89%	09.21		
Holloway x Plymouth		55%			57%			
AVERAGE		78%			75%			

Table 4: Back-to-back storm performance

Were Peak Flow Rates Reduced?

Based on the 25 storms greater than 0.1 inch, GI reduced peak flow rates by 56-85% (Table 3), generally increasing from the east to the west. The average peak flow reduction across the four monitored blocks was 72%, compared to 77% predicted by the SWMM model. The model predicted a 74% reduction across the whole project area. Storms without any overflow had a 100% peak flow rate reduction. In general, the more intense the storm, the higher probability of an overflow. The storm must also last long enough and produce enough runoff volume to exceed the storage capacity of the GI, meaning that duration is also a factor in determining which storms produce overflow.

There was a strong correlation between volume reduction and peak flow reduction. Holloway x Jules fully managed 17 of the 25 storms during the 2018-2019 rainy season with an average 85% peak flow reduction. Holloway x Capital fully managed 8 storms with an average reduction of 79%. Holloway x Faxon, the block with pervious concrete only, did not fully manage any storms due to some gutter flow sending sidewalk runoff directly to the downstream catch basin; the average reduction was 68%. Holloway x Plymouth, the block with underdrains, fully managed 7 smaller storms with an average 56% reduction. GI facilities at Holloway x Plymouth entered a flow-through condition during three larger storms, producing little or no effective peak flow reduction.

The Holloway Green Street project is estimated to have reduced peak flows by a range of 56% to 85% with an average reduction of 72% during the 2018-19 rainy season.

Table 6 characterizes performance during the storms that did produce overflow, and summarizes the number of storms that were fully managed (i.e., produced no overflow) on each block.

	Sto	rms with Overf	low	Storms with no overflow (fully managed)			
Site	# of Storm Events	Min Peak Reduction	Average Peak Reduction	# of Storm Events	Largest Storm Event with No Overflow (in)		
Holloway x Jules	8	43%	75%	17	1.47		
Holloway x Faxon	25	13%	62%	0	0.09		
Holloway x Capitol	17	42%	68%	8	1.04		
Holloway x Plymouth	18	0%	45%	7	0.58		

Table 5: Peak flow reduction characteristics

Examples of Individual Storm Analyses

Three storms were selected to represent various types of events the site experienced during the 2018-2019 monitoring period. Storm 35 represents a storm with low intensity and long duration, the type of storm where GI performs best. This storm was fully managed at three blocks and performance was relatively good at Faxon. Storm 27 represents a larger storm that was the second of back-to-back storms with constistent, moderate intensity lasting over 11 hours. Storm 38 was the largest storm of the monitoring period lasting almost two days with one very intense burst of rainfall. Performance for Storms 27 and 38 varied significantly across the four blocks. Monitoring data for these representative storms show the difference in green infrastructure performance that can result from variable rainfall and soil conditions (Table 7).

Table 6: Discharge characteristics for highlighted storms

		Storm 27	Storm 35	Storm 38
	Dates	Jan 16, 2019	Feb 3-5, 2019	Feb 12-14, 2019
Storm Characteristics	Total Rainfall (in)	1.42	0.58	3.40
	Duration (hh:mm)	11:20	29:20	40:55
	Peak 5-minute Rainfall Intensity (in/hr)	0.84	0.60	3.60
	Volume Reduction (%)	100%	100%	96%
Holloway x Jules	Peak Flow Reduction (%)	100%	100%	66%
	Volume Reduction (%)	62%	72%	48%
Holloway x Faxon	Peak Flow Reduction (%)	62%	90%	13%
U.S. Constant	Volume Reduction (%)	75%	100%	86%
Holloway x Capitol	Peak Flow Reduction (%)	50%	100%	67%
	Volume Reduction (%)	44%	100%	34%
Holloway x Plymouth	Peak Flow Reduction (%)	34%	100%	0%

Storm 35 (Figure 14) represents a low-intensity storm with steady rainfall totaling 0.58 inch over the course of 29 hours starting late in the day on February 3, 2019. A larger storm ended ended earlier in the day so antecedent soil conditions were saturated. Despite that, the consistent low intensity rainfall allowed the GI facilities to fully manage all of the runoff they recieved; it is assumed that the runoff not managed on Faxon flowed directly to the catch basin via the informal gutter.

Figure 15 shows the hydrographs for a relatively large storm event on January 16th, 2019, Storm 27, which produced 1.42 inches of rainfall over the course of 11 hours, including an intense burst at the onset around noon and another later that evening. A moderate storm producing 0.7 inches of rain ended early that morning, so this was the second of a back-to-back storm. There was a wide range of monitored performance across the four blocks during this storm. Unlike Storm 25, which was smaller and less intense, most blocks were not able to fully manage this storm, the exception being Jules. Performance at Faxon was relatively consistent the whole time, hovering around the 59% reduction total for the storm, which reflects the active permeable pavement's ability to manage the vast majority of the runoff it receives. This storm provides a clear illustration of how the initial portion of a storm is absorbed by the storage within the GI facilities. Both Capital and Plymouth performed better at the onset of the storm, then performance deteriorated as storage was exhausted. Capitol absorbed most of the first burst and the ensuing low-intensity rainfall until around 7:00 PM when storage was overwhelmed by the second burst. Plymouth has the poorest draining soils and, given the wet antecedent soil conditions, was only able to absorb the initial portions of each burst and then entered a flow-through condition.

Storm 38 (Figure 16) was the largest storm of the monitoring period and also contained the most intense burst. It had been almost three days since the previous storm, so all facilities started out with ample storage. The storm lasted almost two days with a total depth of 3.4 inches, including 0.58 inch over a 30-minute period late in the morning on February 13th. As with Storm 27, there was a wide range of monitored performance across the four blocks. None of the blocks were able to fully manage the storm. Jules managed virtually the entire storm outside of the one huge burst, reducing overall volume by 96% and significantly dampening the peak flow. Capital also performed well, significantly reducing volume by 86% and dampening peak flows. As with most storms, Faxon performed consistently, but was overwhelmed by the large burst. The storage at Plymouth was exhausted around eight hours into the storm, and GI on this block was not effective in managing most subsequent flows by either measure of volume or peak flow.



Figure 10: Hydrographs for Storm 35 at Holloway x a) Jules, b) Faxon, c) Capitol, d) Plymouth

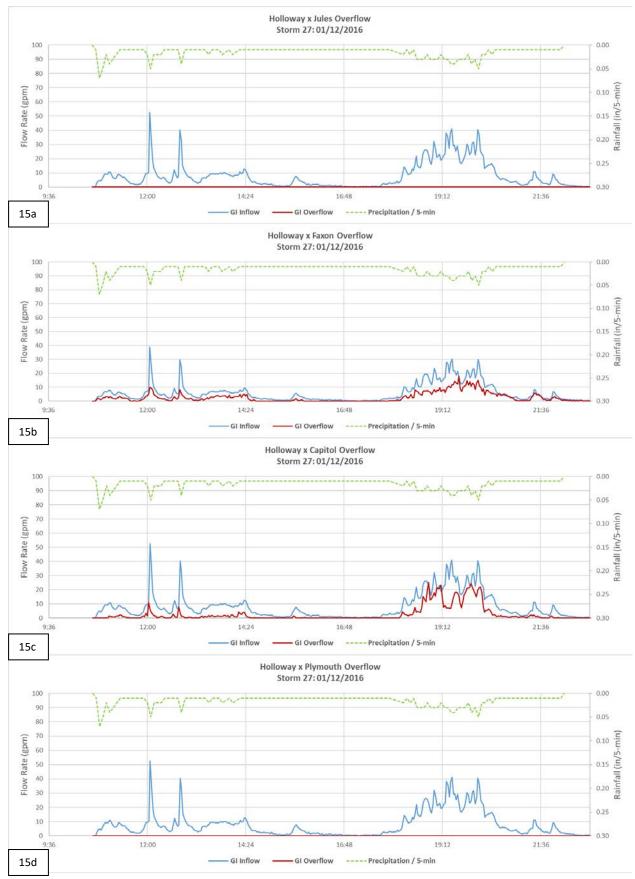


Figure 11: Hydrographs for Storm 27 at Holloway x a) Jules, b) Faxon, c) Capitol, and d) Plymouth

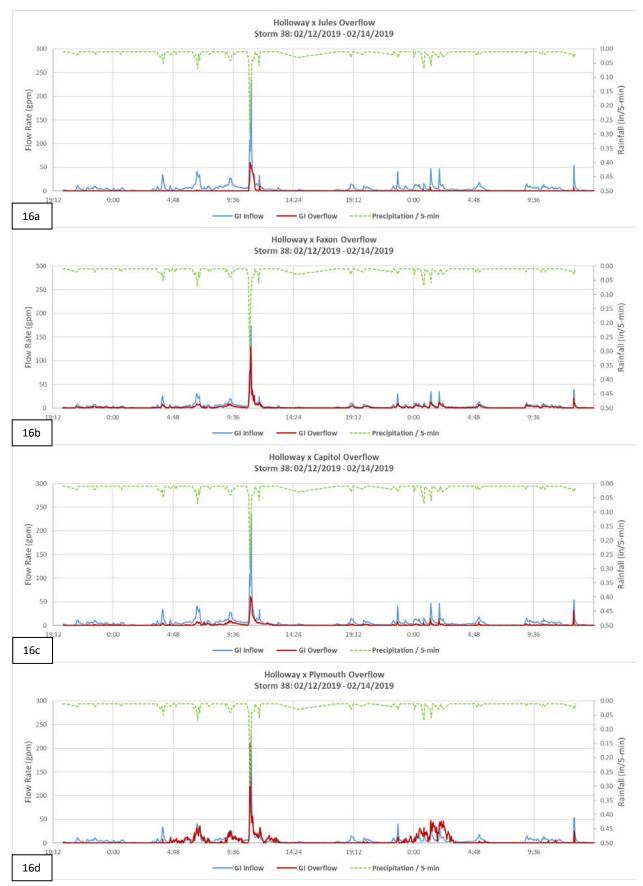


Figure 12: Hydrographs for Storm 38 at Holloway x a) Jules, b) Faxon, c) Capitol, and d) Plymouth

Summary

GI significantly reduced the volume and peak flow of stormwater entering the CSS within the project area. The monitored volume reduction on the four monitored blocks was approximately 215,000 gallons (77%) during the 2018-2019 rainy season, and the monitored peak flow reduction averaged 72% across those blocks.

Total performance across the entire project area was extrapolated from measured performance at the four monitored blocks based on a SWMM model built to represent the full project area. The ratio of monitored to modeled performance for both volume and peak flow reduction at the four monitored blocks was applied to the modeled performance at the unmonitored blocks to estimate their annual performance. Overall, the Holloway Green Street project is estimated to have reduced the volume of stormwater flowing to the CSS by 78% (764,000 gallons) and the peak flows by an average of 72% during the 2018-2019 rainy season.

Modeling results were strongly correlated to the monitoring results, although the monitored performance at Holloway x Faxon was significantly lower than model predictions because an informal gutter formed against the curb where sediment has accumulated and clogged the pervious concrete resulting in the majority of sidewalk runoff draining directly to the downstream catch basin. Overall volume and peak flow reduction was very similar to the first year of monitoring. However, performance relative to model predictions decreased slightly, perhaps reflecting the accumulation of some fines in the pore spaces of infiltrative media, both soil and permable pavement.

Overflow from the green infrastructure was related to three main characteristics: 1) storm intensity – less intense storms produced little to no overflow while more intense storms produced overflow on most blocks; 2) infiltration capacity of the native soil – more infiltrative soil yields higher performance; and 3) facility size – larger sizing ratios improve performance. The underlying soil infiltration capacity is the single largest factor affecting project performance. Pre-construction site investigation revealed more infiltrative soils at the western end of the project, decreasing in infiltration capacity to the east. Similarly, facility performance was highest at the west end and decreased to the east.

Lesson Learned

There were two primary lessons learned from the Holloway Green Street project that should be carried forward to future GI monitoring projects.

- 1) The Faxon block includes only pervious concrete, no bioretention planters. The pervious concrete was installed all the way up to the curb with no formal gutter. This was done with the knowledge that fines might accumulate and clog a narrow swath along the low-lying edge against the curb, which has happened. While this had a significant impact on performance during both years of monitoring 75-80% of the sidewalk runoff drained directly to the downstream catchbasin there is no drawback as compared to installing a formal gutter, which would have cost more and guaranteed no management of any sidewalk area. Overall, this configuration was not problematic and increased cost effectiveness compared to pervious concrete with a traditional curb and gutter. The formation of the informal gutter demonstrates that the City's standard vac trucks are not able to remove sediment all the way up to the curb. The rotating brushes do push a good portion of the sediment to where the vacuum component can capture it, but the scouring action also pushes some of the sediment down into pervious concrete's pore spaces.
- 2) A SWMM model was built in support of the monitoring results for this Holloway Green Street project. In addition to increasing confidence in the monitoring results by providing a valuable QA tool, it has also proven a valuable tool in terms of evaluating trends year over year. Measured performance can be biased from one year to the next by different rainfall patterns. However, comparing monitored results against model predictions normalizes the performance evaluation in regards to variable rainfall.

Summary Table, Holloway x Jules

						Vo	olume			Flow	
Storm Number	Storm Start	Storm Duration (hh:mm:ss)	Rainfall Depth (in)	Peak 5-minute Rainfall Intensity (in/hr)	Inflow to GI (Gallons)	Overflow (Gallons)	Retention Volume (Gallons)	Block Scale Volume Reduction (%)	Peak Flow Entering Gl (GPM)	Peak Overflow (GPM)	Peak Discharge Reduction (%)
1	11/21/2018 7:55	7:10:00	0.89	0.04	3,532	-	3,532	100%	28	-	100%
2	11/22/2018 17:35	24:20:00	1.44	0.05	6,517	231	6,285	96%	33	9	74%
3	11/24/2018 1:40	4:55:00	0.04	0.01	-	-	-	NA	-	-	NA
4	11/26/2018 6:35	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
5	11/27/2018 9:20	10:10:00	0.18	0.02	773	-	773	100%	8	-	100%
6	11/28/2018 5:40	1:10:00	0.02	0.01	-	-	-	NA	-	-	NA
7	11/28/2018 19:15	5:05:00	0.80	0.11	2,466	329	2,137	87%	46	24	48%
8	11/29/2018 7:10	9:35:00	0.26	0.06	971	181	790	81%	35	18	49%
9	12/1/2018 6:45	3:10:00	0.10	0.04	-	-	-	NA	30	-	NA
10	12/1/2018 16:15	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
11	12/4/2018 23:40	4:30:00	0.23	0.03	856	-	856	100%	31	-	100%
12	12/5/2018 10:10	2:25:00	0.02	0.01	-	-	-	NA	-	-	NA
13	12/11/2018 2:25	4:05:00	0.02	0.01	-	-	-	NA	-	-	NA
14	12/14/2018 10:35	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
15	12/14/2018 16:55	1:25:00	0.09	0.01	-	-	-	NA	-	-	NA
16	12/16/2018 14:15	10:05:00	0.80	0.11	3,035	171	2,864	94%	71	34	52%
17	12/17/2018 7:10	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
18	12/21/2018 6:40	0:35:00	0.07	0.02	-	-	-	NA	-	-	NA
19	12/23/2018 17:10	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
20	12/24/2018 6:45	16:25:00	0.50	0.04	1,822	-	1,822	100%	33	-	100%
21	1/5/2019 7:10	9:35:00	0.33	0.05	1,006	-	1,006	100%	43	-	100%
22	1/6/2019 7:40	13:40:00	1.47	0.03	4,946	-	4,946	100%	19	-	100%
23	1/9/2019 0:15	3:15:00	0.08	0.02	-	-	-	NA	6	-	NA
24	1/11/2019 15:15	9:10:00	0.06	0.01	-	-	-	NA	5	-	NA
25	1/14/2019 9:20	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
26	1/15/2019 6:30	21:50:00	0.70	0.03	3,362	-	3,362	100%	13	-	100%
27	1/16/2019 10:45	11:20:00	1.42	0.07	5,787	-	5,787	100%	39	-	100%
28	1/17/2019 7:45	7:05:00	0.81	0.21	3,281	992	2,288	70%	53	36	31%
29	1/20/2019 3:05	6:45:00	0.14	0.02	486	-	486	100%	5	-	100%
30	1/20/2019 17:05	5:05:00	0.05	0.01	-	-	-	NA	3	-	NA
31	1/30/2019 20:00	7:55:00	0.52	0.04	1,563	-	1,563	100%	17	-	100%
32	2/1/2019 0:50	1:50:00	0.02	0.01	-	-	-	NA	-	-	NA
33	2/1/2019 16:30	15:10:00	0.67	0.07	2,385	-	2,385	100%	46	-	100%
34	2/2/2019 15:10	15:40:00	0.91	0.06	2,894	257	2,636	91%	36	20	43%
35	2/3/2019 22:05	29:20:00	0.58	0.05	2,060	-	2,060	100%	25	-	100%
36	2/8/2019 12:55	4:35:00	0.27	0.02	723	-	723	100%	9	-	100%
37	2/9/2019 4:20	25:55:00	0.42	0.05	1,519	-	1,519	100%	28	-	100%
38	2/12/2019 20:00	40:55:00	3.40	0.30	14,380	307	14,073	96%	173	60	66%
39	2/14/2019 21:15	9:00:00	0.25	0.04	969	20	949	98%	40	15	63%
40	2/15/2019 13:55	1:30:00	0.04	0.02	-	-	-	NA	-	-	NA 100%
41	2/15/2019 23:05	11:10:00	0.17	0.03	456	-	456	100%	28	-	100%
42	2/16/2019 17:00	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA 100%
43	2/17/2019 1:50	4:05:00	0.22	0.04	462	-	462	100%	22	-	100%
44	2/25/2019 7:10	0:35:00	0.04	0.01	-	-	-	NA	-	-	NA
45	2/25/2019 14:00	2:55:00	0.09	0.01	-	-	-	NA	6	-	NA 100%
46	2/26/2019 0:25	28:25:00	1.04	0.05	8,417	-	8,417	100%	33	-	100%
47	2/27/2019 12:55	7:25:00	0.05	0.01	-	-	-	NA	3	-	NA
48	3/1/2019 23:50	0:05:00	0.02	0.01	-			NA	-	-	NA
	TOTAL AVERAGE	16.6 0.3	19.30 0.40	0.04	74,668 1.556	2,488 52	· · ·		20	4	
	AVERAGE 1AXIMUM				/	-	1,504	97%	-		
N		1.7	3.40	0.30	14,380	992	14,073		173	60	

Summary Table, Holloway x Faxon

						Vo		Flow				
Storm Number	Storm Start	Storm Duration (hh:mm:ss)	Rainfall Depth (in)	Peak 5-minute Rainfall Intensity (in/hr)	Inflow to GI (Gallons)	Overflow (Gallons)	Retention Volume (Gallons)	Block Scale Volume Reduction (%)	Peak Flow Entering Gl (GPM)	Peak Overflow (GPM)	Peak Discharge Reduction (%	
1	11/21/2018 7:55	7:10:00	0.89	0.04	2,598	463	2,135	82%	28	3	89%	
2	11/22/2018 17:35	24:20:00	1.44	0.05	4,794	709	4,085	85%	33	5	86%	
3	11/24/2018 1:40	4:55:00	0.04	0.01	-	-	-	NA	-	-	NA	
4	11/26/2018 6:35	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA	
5	11/27/2018 9:20	10:10:00	0.18	0.02	568	83	486	85%	8	3	70%	
6	11/28/2018 5:40	1:10:00	0.02	0.01	-	-	-	NA	-	-	NA	
7	11/28/2018 19:15	5:05:00	0.80	0.11	1,814	630	1,184	65%	46	18	61%	
8	11/29/2018 7:10	9:35:00	0.26	0.06	714	358	356	50%	35	14	60%	
9	12/1/2018 6:45	3:10:00	0.10	0.04	312	83	229	100%	30	5	100%	
10	12/1/2018 16:15	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA	
11	12/4/2018 23:40	4:30:00	0.23	0.03	629	50	579	92%	31		98%	
12	12/5/2018 10:10	2:25:00	0.02	0.01	-	-	-	NA	-	-	NA	
13	12/11/2018 2:25	4:05:00	0.02	0.01				NA NA	-		NA	
14	12/14/2018 10:35	0:00:00			-	-	-			-	NA	
15	12/14/2018 16:55	1:25:00	0.09	0.01	-	-	-	NA	4	-	NA	
16	12/16/2018 14:15	10:05:00	0.80	0.11	2,233	1,292	941	42%	71	22	68%	
17	12/17/2018 7:10	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA	
18 19	12/21/2018 6:40	0:35:00	0.07	0.02	-	-	-	NA NA	-	-	NA NA	
	12/23/2018 17:10											
20	12/24/2018 6:45	16:25:00	0.50	0.04	1,340 740	501 29	839	63% 96%	33 43	11 15	68% 64%	
21 22	1/5/2019 7:10	9:35:00	0.33	0.05		_	711		43	-	64%	
22	1/6/2019 7:40 1/9/2019 0:15	13:40:00 3:15:00	0.08	0.03	3,639	1,251	2,387	66%	- 19	- 6		
23	1/9/2019 0:15	9:10:00	0.08	0.02	-	-	-	NA NA	-	-	NA NA	
24	1/11/2019 15:15	0:00:00	0.06	0.01	-	-	-	NA	-	-	NA	
25	1/14/2019 9:20	21:50:00	0.01	0.01	2,473	927	1,547	63%	- 13	- 7	NA 50%	
20	1/16/2019 10:45	11:20:00	1.42	0.03	4,257	1,610	2,647	62%	39	15	62%	
27	1/17/2019 10:45	7:05:00	0.81	0.07	2,413	1,610	888	37%	53	37	30%	
28	1/20/2019 3:05	6:45:00	0.81	0.21	358	36	322	90%	53	37	307	
30	1/20/2019 3:05	5:05:00	0.14	0.02	- 358	30	- 322	90% NA	5	-	100%	
30	1/20/2019 17:03	7:55:00	0.05	0.01	1,150	379	- 771	NA 67%	- 17	- 8	56%	
32	2/1/2019 20:50	1:50:00	0.02	0.04	1,150			NA		-	NA	
33	2/1/2019 16:30	15:10:00	0.02	0.01	1,755	806	949	54%	46	13	719	
33	2/2/2019 15:10	15:40:00	0.07	0.07	2,129	1,497	632	30%	36	13	619	
34	2/3/2019 22:05	29:20:00	0.51	0.00	1,516	424	1,092	72%	25	2	90%	
36	2/8/2019 12:55	4:35:00	0.38	0.03	532	424	418	72%	23	3	64%	
30	2/9/2019 4:20	25:55:00	0.27	0.02	1,117	473	644	58%	28	8	729	
37	2/12/2019 20:00	40:55:00	3.40	0.30	10,578	5,449	5,129	48%	173	151	139	
39	2/12/2019 20:00	9:00:00	0.25	0.30	713	344	369	52%	40	131	56%	
40	2/15/2019 13:55	1:30:00	0.04	0.04	-	-		NA		- 10	NA NA	
40	2/15/2019 23:05	11:10:00	0.04	0.02	335	78	257	77%	28	6	789	
41	2/16/2019 23:03	0:00:00	0.17	0.03		- 18		NA	- 20		NA	
42	2/17/2019 1:50	4:05:00	0.01	0.01	340	115	225	66%	- 22	- 4	839	
43	2/25/2019 7:10	0:35:00	0.22	0.04	- 540	- 115		NA		- 4	NA	
44	2/25/2019 14:00	2:55:00	0.04	0.01		-	-	NA		-	NA	
45	2/26/2019 0:25	2:55:00	1.04	0.01	6,192	2,143	4,048	65%	- 33	- 5	869	
40	2/27/2019 12:55	7:25:00	0.05	0.03	- 0,192	2,143	4,048	NA			NA	
47	3/1/2019 23:50	0:05:00	0.03	0.01		-	-	NA	-	-	NA	
40	TOTAL	16.6	19.30	0.01	55,240			IN/A	-			
_	AVERAGE	0.3	0.40	0.04	1,151	445	706	61%	20	8		
		1.7			10.578	5.449	5.129		173			

Summary Table, Holloway x Capitol

						Vo	olume			Flow	
Storm Number	Storm Start	Storm Duration (hh:mm:ss)	Rainfall Depth (in)	Peak 5-minute Rainfall Intensity (in/hr)	Inflow to GI (Gallons)	Overflow (Gallons)	Retention Volume (Gallons)	Block Scale Volume Reduction (%)	Peak Flow Entering Gl GPM)	Peak Overflow (GPM)	Peak Discharge Reduction (%
1	11/21/2018 7:55	7:10:00	0.89	0.04	3,532	78	3,454	94%	-	2	94%
2	11/22/2018 17:35	24:20:00	1.44	0.05	6,504	462	6,043	80%	33	7	80%
3	11/24/2018 1:40	4:55:00	0.04	0.01	-	-	-	NA	-	-	NA
4	11/26/2018 6:35	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
5	11/27/2018 9:20	10:10:00	0.18	0.02	771	-	771	100%	8	-	1009
6	11/28/2018 5:40	1:10:00	0.02	0.01	-	-	-	NA	-	-	NA
7	11/28/2018 19:15	5:05:00	0.80	0.11	2,461	457	2,005	42%	46	26	429
8	11/29/2018 7:10	9:35:00	0.26		969	137	832	52%	35	17	529
9	12/1/2018 6:45	3:10:00	0.10		-	-	-	NA	-	-	NA
10	12/1/2018 16:15	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
11	12/4/2018 23:40	4:30:00	0.23	0.03	854	46	808	99%	31	-	99%
12	12/5/2018 10:10	2:25:00	0.02	0.01	-	-	-	NA	-	-	NA
13	12/11/2018 2:25	4:05:00	0.02	0.01	-	-	-	NA	-	-	NA
14	12/14/2018 10:35	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
15	12/14/2018 16:55	1:25:00	0.09	0.01	-	-	-	NA	-	-	NA
16	12/16/2018 14:15	10:05:00	0.80	0.11	3,029	505	2,524	84%	71	11	849
17	12/17/2018 7:10	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
18	12/21/2018 6:40	0:35:00	0.07	0.02	-	-	-	NA	-	-	NA
19	12/23/2018 17:10	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
20	12/24/2018 6:45	16:25:00	0.50	0.04	1,818	357	1,461	56%	33	14	569
21	1/5/2019 7:10	9:35:00	0.33	0.05	1,004	13	991	87%	43	5	879
22	1/6/2019 7:40	13:40:00	1.47	0.03	4,937	799	4,138	63%	19	7	639
23	1/9/2019 0:15	3:15:00	0.08	0.02	-	-	-	NA	-	-	NA
24	1/11/2019 15:15	9:10:00	0.06	0.01	-	-	-	NA	-	-	NA
25	1/14/2019 9:20	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
26	1/15/2019 6:30	21:50:00	0.70	0.03	3,356	-	3,356	100%	13	-	1009
27	1/16/2019 10:45	11:20:00	1.42	0.07	5,776	1,447	4,329	50%	39	19	50%
28	1/17/2019 7:45	7:05:00	0.81	0.21	3,275	344	2,931	67%	53	17	679
29	1/20/2019 3:05	6:45:00	0.14	0.02	485	-	485	100%	5	-	1009
30	1/20/2019 17:05	5:05:00	0.05	0.01	-	-	-	NA	3	-	NA
31	1/30/2019 20:00	7:55:00	0.52	0.04	1,560	39	1,521	87% NA	17	2	879
32	2/1/2019 0:50	1:50:00									NA
33	2/1/2019 16:30	15:10:00	0.67	0.07	2,381	145	2,236	59%	46	19	59% 56%
34	2/2/2019 15:10	15:40:00 29:20:00	0.91	0.06	2,888	876	2,012	56%	25	- 16	1009
35 36	2/3/2019 22:05 2/8/2019 12:55		0.58	0.03	2,057 721	-	2,057 721	100% 100%	25	-	1009
30		4:35:00	0.27	0.02		-		100%	28	-	1009
37	2/9/2019 4:20 2/12/2019 20:00	25:55:00 40:55:00	3.40		1,516 14,353	- 1,992	1,516 12,361	67%	173	- 57	679
38	2/12/2019 20:00	9:00:00	3.40	0.30	968	1,992	868	54%	40	19	549
39 40	2/14/2019 21:15	1:30:00	0.25	0.04	- 908			NA 54%	- 40	- 19	NA 547
40	2/15/2019 13:55	11:10:00	0.04	0.02	- 455	-	455	100%	-	-	1009
41	2/15/2019 23:05	0:00:00	0.17	0.03	435	-	435	NA	-		NA
42	2/17/2019 17:00	4:05:00	0.01	0.01	462	- 9	453	74%	- 22	- 6	NA 749
43	2/17/2019 1:50	0:35:00	0.22	0.04	462	9	453	74%	- 22	-	NA 749
44	2/25/2019 7:10	2:55:00	0.04	0.01	-	-	-	NA	-	-	NA
45	2/25/2019 14:00 2/26/2019 0:25	2:55:00	1.04	0.01	- 8,401	-	- 8,401	100%	- 33	-	NA 1009
40	2/26/2019 0:25	7:25:00	0.05	0.05	- 8,401	-	0,401	NA	- 33	-	NA
47	3/1/2019 23:50	0:05:00	0.03	0.01	-	-	-	NA	-	-	NA
48	3/1/2019 23:50 TOTAL	16.6	19.30		74,535				-	-	NA .
	AVERAGE	0.3	0.40		1,553	163	1,390	90%	19	5	
		1.7	0.40 3.40			1.992	1,390	100%			

Summary Table, Holloway x Plymouth

	_	-				Vo	olume			Flow	
Storm Number	Storm Start	Storm Duration (hh:mm:ss)	Rainfall Depth (in)	Peak 5-minute Rainfall Intensity (in/hr)	Inflow to GI (Gallons)	Overflow (Gallons)	Retention Volume (Gallons)	Block Scale Volume Reduction (%)	Peak Flow Entering Gl (GPM)	Peak Overflow (GPM)	Peak Discharge Reduction (%)
1	11/21/2018 7:55	7:10:00	0.89	0.04	3,532	603	2,929	94%	39	16	58%
2	11/22/2018 17:35	24:20:00	1.44	0.05	6,517	2,127	4,389	80%	45	26	43%
3	11/24/2018 1:40	4:55:00	0.04	0.01	-	-	-	NA	-	-	NA
4	11/26/2018 6:35	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
5	11/27/2018 9:20	10:10:00	0.18	0.02	773	-	773	100%	-	-	100%
6	11/28/2018 5:40	1:10:00	0.02	0.01	-	-	-	NA	-	-	NA
7	11/28/2018 19:15	5:05:00	0.80	0.11	2,466	599	1,868	42%	62	31	51%
8	11/29/2018 7:10	9:35:00	0.26	0.06	971	63	908	52%	48	19	60%
9	12/1/2018 6:45	3:10:00	0.10	0.04	-	-	-	NA	-	-	NA
10	12/1/2018 16:15	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
11	12/4/2018 23:40	4:30:00	0.23	0.03	856	283	572	99%	42	13	69%
12	12/5/2018 10:10	2:25:00	0.02	0.01	-	-	-	NA	-	-	NA
13	12/11/2018 2:25	4:05:00	0.02	0.01	-	-	-	NA	-	-	NA
14	12/14/2018 10:35	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
15	12/14/2018 16:55	1:25:00	0.09	0.01	-	-	-	NA	-	-	NA
16	12/16/2018 14:15	10:05:00	0.80	0.11	3,035	1,778	1,257	84%	96	66	32%
17	12/17/2018 7:10	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
18	12/21/2018 6:40	0:35:00	0.07	0.02	-	-	-	NA	-	-	NA
19	12/23/2018 17:10	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
20	12/24/2018 6:45	16:25:00	0.50	0.04	1,822	428	1,394	56%	45	27	41%
21	1/5/2019 7:10	9:35:00	0.33	0.05	1,006	103	903	87%	58	31	47%
22	1/6/2019 7:40	13:40:00	1.47	0.03	4,946	3,544	1,402	63%	25	26	0%
23	1/9/2019 0:15	3:15:00	0.08	0.02	-	-	-	NA	-	-	NA
24	1/11/2019 15:15	9:10:00	0.06	0.01	-	-	-	NA	-	-	NA
25	1/14/2019 9:20	0:00:00	0.01	0.01	-	-	-	NA	-	-	NA
26	1/15/2019 6:30	21:50:00	0.70	0.03	3,362	244	3,118	100%	18	16	8%
27	1/16/2019 10:45	11:20:00	1.42	0.07	5,787	3,259	2,529	50%	53	35	34%
28 29	1/17/2019 7:45	7:05:00	0.81	0.21	3,281 486	2,439	841 486	67% 100%	72	52	28% 100%
	1/20/2019 3:05	6:45:00	0.14	0.02	486	-	486		-	-	
30 31	1/20/2019 17:05 1/30/2019 20:00	5:05:00	0.05	0.01		- 214		NA 87%	- 23	- 11	NA 51%
			0.52	0.04	1,563	- 214	1,349	87% NA	- 23		51% NA
32 33	2/1/2019 0:50 2/1/2019 16:30	1:50:00	0.02	0.01	2,385	881	1,504	59%	- 62	- 28	54%
33	2/2/2019 15:10	15:10:00	0.87	0.07	2,385	1,749	1,504	59%	49	28	54% 44%
34	2/3/2019 13:10	29:20:00	0.91	0.05	2,894	1,749	2,060	100%	- 49		100%
35	2/8/2019 22:05	4:35:00	0.58	0.03	723	-	723	100%	-	-	100%
30	2/9/2019 12:33	25:55:00	0.27	0.02	1,519	-	1,519	100%	-	-	100%
37	2/12/2019 4:20	40:55:00	3.40	0.05	1,519	9,561	4,818	67%	236	259	0%
38	2/12/2019 20:00	9:00:00	0.25	0.30	14,380	360	4,818	54%	54	32	40%
40	2/15/2019 21:15	1:30:00	0.23	0.04	909	- 500		NA S4%	- 54		40%
40	2/15/2019 13:33	1:10:00	0.04	0.02	456	-	456	100%	-	-	100%
41	2/16/2019 23:03	0:00:00	0.17	0.03	450	-	450	NA	-	-	NA
42	2/17/2019 17:50	4:05:00	0.01	0.01	462	-	462	74%	-	-	100%
43	2/25/2019 7:10	0:35:00	0.22	0.04	402	-	402	NA NA	-	-	NA 100%
44	2/25/2019 14:00	2:55:00	0.04	0.01		-	-	NA	-	-	NA
45	2/26/2019 14:00	2:55:00	1.04	0.01	8,417	4,471	3,946	100%	- 45	32	30%
40	2/27/2019 12:55	7:25:00	0.05	0.03	- 0,417	- 4,471	- 5,940	NA	- 45	-	NA 30%
47	3/1/2019 23:50	0:05:00	0.03	0.01	-	-	-	NA	-	-	NA
40	TOTAL	16.6	19.30	0.01	74,668	32,709		IN/A	-		NA .
	AVERAGE	0.3	0.40	0.04	1,556	681	874	56%	22	16	
		1.7	3.40	0.30	14,380	9,561	4,818		236		
IV.		1.7	5.40	0.30			4, 818		-230	233	