

## REMOVABLE CAP LUMINAIRE AS INSTALL DUPLICATE BRACKET ARM WHERE "TWIN-MEMBER" STREETLIGHTS ARE SPECIFIED --/ TYPE K ARM (PLAN A-33,705 CH.1) 6' LONG OR AS SPECIFIED PRE-STRESSED REINFORCED ROUND CONCRETE SHAFT WITH ETCHED OR SAND-BLASTED MARBLE-CHIP FINISH. O.D. BASE 9' O.D. TOP 6" LENGTH OF CONCRETE SHAFT 28'-0" TRAFFIC SIGNAL SEE DETAIL TRAFFIC SIGNAL INSERT WHEN REQUIRED RAMP CONCRETE FLAG 1" RISE IN 6" HORIZONTAL MEASUREMENT SIDEWALK LEVEL -- SHAFT ANCHOR BASE **ELEVATION**

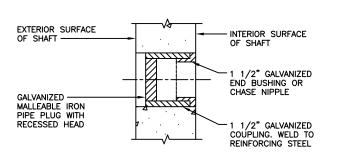

**DETAIL** 

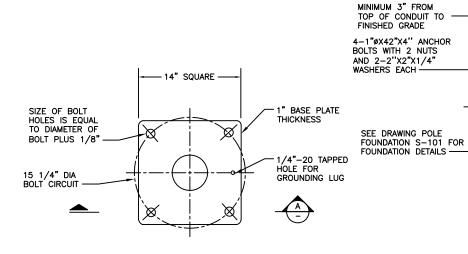

POLE BASE DETAIL

## **SHEET NOTES:**

2 1/4" X 5" HANDHOLE -

#6 BARE STRANDED COPPER WIRE WITH SOLDER-LESS LUG


WITH COVER

1. HANDHOLE COVER SHALL BE CURVED TO CONFORM TO SHAFT.

2" TO 4'

<del>-====</del>

- POLE-TOP BRACKET, ARM, POLE TOP, HANDHOLE COVER, AND ANCHOR BOLTS WITH NUTS AND WASHERS SHALL BE STEEL. HOT-DIP GALVANIZED AFTER FABRICATION.
- 3. ALL SCREWS, NUTS, WASHERS AND FASTENINGS SHALL BE STAINLESS STEEL. LOCKWASHERS SHALL BE OF THE SHAKEPROOF TYPE WITH INTERNAL TEETH.
- 4. THREADED RODS SHALL BE COATED WITH GRAPHITE GREASE BEFORE AND AFTER ASSEMBLY AND INSTALLATION OF POLE TOP BRACKET AND CAP.
- LOCATION AND ORIENTATION OF LUMINAIRE, IDENTIFICATION NUMBER, AND CONDUITS SHALL BE AS SHOWN ON CONTRACT PLANS.
- 6. BRACKET ARMS SHALL BE ORIENTED PERPENDICULAR TO CENTERLINE OF ROADWAYS.

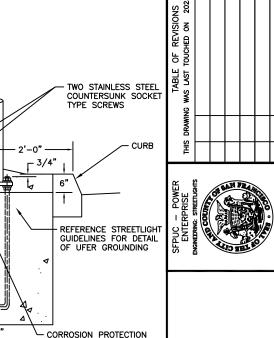

PIPE WRAP TAPE REQUIRED FOR RGS CONDUIT INSIDE **PLANS** 

**TANDARD** 

. ഗ STREETLIGHT ON HEAVY CONCRETE STANDARD INSTALLATION DETAILS

THIS STANDARD PLAN WAS DEVELOPED FOR USE ON PUBLIC UTILITIES COMMISSION PROJECTS IN THE CITY AND COUNTY OF SAN FRANCISCO, AND SHALL NOT BE USED WITHOUT CONSULTING A REGISTERED PROFESSIONAL ENGINEER. SFPUC/POWER RESERVES THE RIGHT TO MAKE REVISIONS TO THIS STANDARD PLAN AT ANYTIME.

SECTION (A)

REVISION NUMBER

SHEET NAME

1.0

PE2656.08